

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)


PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

SE00/166-1

10/070167

PCT/ SE 00 / 0 1 6 6 1

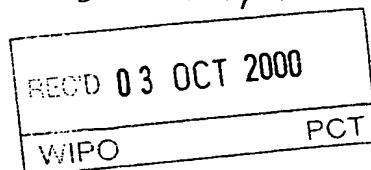

Intyg
Certificate



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Tetra Laval Holdings & Finance SA, Fully CH
Applicant (s)

(21) Patentansökningsnummer 9903176-7
Patent application number

(86) Ingivningsdatum 1999-09-07
Date of filing

Stockholm, 2000-09-20

För Patent- och registreringsverket
For the Patent- and Registration Office

Åsa Dahlberg
Åsa Dahlberg

Avgift
Fee

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

1999-09-07

Huvudfaxen Kassan

A METHOD OF PRODUCING A LAMINATED PACKAGING MATERIAL, PACKAGING MATERIAL PRODUCED BY THE METHOD, AS WELL AS PACKAGING CONTAINERS PRODUCED FROM THE PACKAGING MATERIAL

5 TECHNICAL FIELD

The present invention relates to a method of producing a laminated packaging material comprising a core layer of paper or paperboard and a barrier layer applied on one side of the core layer.

- 10 The present invention also relates to a laminated packaging material produced according to the method, as well as to packaging containers which are produced from the laminated packaging material. Particularly advantageous packaging laminates in which polyvinyl alcohol, preferably in combination with nanoparticles, is used as a barrier layer material are provided.

15 BACKGROUND ART

- It is well-known in the packaging industry to employ laminated packaging material of a single-use nature for packing and transporting liquid foods. Normally, such laminated packaging materials are built up from a configurationally rigid but foldable core layer consisting of, for example, paper or paperboard in order to achieve good mechanical configurational stability. Liquid-tight coatings of plastic are applied on both sides of the core layer and effectively protect the core layer of liquid-absorbing fibre from penetration by moisture. These outer layers normally consist of a thermoplastic, preferably polyethylene, which moreover impart to the packaging material superior thermosealing properties, whereby the packaging material may be converted into finished packages with the desired geometric configuration.

- However, laminated packaging material consisting solely of paper or paperboard and liquid-tight plastic lacks tightness properties vis-à-vis gases, in particular oxygen gas. This is a major drawback in the packing of many foods whose shelf-life deteriorates dramatically when in contact with oxygen gas, such as for example fruitjuices. In order to supplement the packaging material with a barrier against gases, especially oxygen gas, it is known in the art to apply a layer possessing superior oxygen gas tightness properties, for example aluminium foil or polyvinyl alcohol, on that side of the core layer which is intended to face in towards the inside of the package.

1999-09-07

Huvudfoxen Kassan

2

In comparison with aluminium foil, polyvinyl alcohol enjoys many desirable properties, with the result that it is preferred as barrier material in many contexts. Among these, mention might be made of the polyvinyl alcohol's superior strength properties, compatibility with foods and economic value, together with its excellent oxygen gas barrier properties. Moreover, it has been considered to be expedient, in certain cases from the point of view the environment and recycling, to replace aluminium foil as the gas barrier material in food packages.

Like many other conceivable barrier or adhesive polymers such as, for example, ethylene vinyl alcohol, starch, starch derivative, carboxy methyl cellulose and other cellulose derivatives or mixtures thereof, polyvinyl alcohol is suitably applied by means of a coating process, i.e. in the form of a dispersion or aqueous solution which, on application, is spread out to a thin, uniform layer on the substrate and thereafter dried. We have found that one drawback in this process however is that an aqueous polymer dispersion or polymer solution of, for example, polyvinyl alcohol, optionally with an addition of EAA, which is applied on a core layer of paper or paperboard penetrates into the liquid-absorbing fibres of the core layer. In connection with the removal of water for drying and possibly for curing the applied barrier layer, the core layer is also subjected to elevated temperatures for drying, and as a result the risk of undesirable crack formation in the paperboard or paper layer, respectively, increases as a result of the moisture content which is difficult to adjust, and the drying which takes place in this layer.

Swedish Patent No. 440519 proposed including a thickening agent such as alginate to reduce penetration of water into the board. The use of PVOH as a barrier material applied over a polymer layer preventing crack formation and smoothing the board surface was disclosed in WO97/13639.

One drawback is that the polyvinyl alcohol is moisture sensitive and rapidly loses its barrier properties when it is exposed to a damp environment. This inconvenience was previously obviated according to WO97/22536 by combining the polyvinyl alcohol with one or more per se known food-approved polymers, for example ethylene acrylic acid copolymer (EAA) or styrene butadiene copolymer. These advantageously form, in combination with polyvinyl alcohol, a coherent, well-integrated layer possessing superior gas barrier properties, in particular oxygen gas barrier properties, at the same time as the desired superior gas barrier properties of the polyvinyl alcohol are retained even in a damp environment.

WO97/22536 disclosed that polyvinylalcohol mixed with EAA-ethylene copolymer or the like material could be dispersion coated onto a paperboard previously coated with a polymer and thereafter could be dried and cured at temperatures of up to 170 °C to form a laminated packaging material with a very

1999-09-07

Huvudfaxen Kassar

3

good barrier property and with good adhesion between the barrier layer and the substrat layer.

Without being restricted to any particular theory, it is suggested that the improved oxygen and water barrier properties results from an esterification
5 reaction between the PVOH and the EAA at the increased curing temperature, whereby the PVOH is crosslinked by hydrophobic EAA polymer chains, which thereby are built into the structure of the PVOH.

Another drawback in the employment of, for example, polyvinyl alcohol as barrier layer instead of aluminium foil is that, on storage of light-sensitive foods, it
10 is necessary in many cases also to incorporate into the packaging material a light barrier of some type. Granted, a core layer of paper or paperboard does not (to the naked eye) allow the passage of any light, but light in invisible wavelength ranges nevertheless penetrates through from the outside of a packaging container to the packed food product and may have a negative effect on it from the point of view of
15 shelf-life. The employment of aluminium foil in the packaging material enjoys that advantage that the aluminium foil in itself constitutes a good barrier against both gases and against light. On the other hand, polyvinyl alcohol is as good as completely transparent even in mixtures with a hydrophobic polymer such as ethylene acrylic acid copolymer or styrene butadiene copolymer. The admixture of
20 conventional light barriers, such as carbon black and titanium dioxide into any of the plastic layers included in the laminated packaging material according to WO97/22536 is per se possible, but would entail an aesthetically unattractive appearance in the package.

Yet a further drawback inherent in the laminated packaging material
25 including barrier layers of, for example, polyvinyl alcohol possibly together with another polymer is that this packaging material cannot be produced employing the same production equipment as in the production of packaging material using aluminium foil as the barrier layer, which involves capital investment costs for new production equipment.

30

OBJECTS OF THE INVENTION

We have now found that a laminated packaging material possessing excellent barrier properties, in particular against gases, may be produced using a method which lends itself to being carried out using conventional production
35 equipment of the type employed in the production of packaging materials with aluminium foil as the barrier layer.

We have also now established that it is possible in a paperboard packaging laminat for liquid food packaging to obtain excellent high performance oxyg n

1999 -09- 0

Huvudfoxen Kossan

4

barrier properties from thus of a gas barrier composition including a dispersible or soluble polymer.

Furthermore, by avoiding coating the liquid gas barrier composition onto the core layer in connection with the lamination of the packaging material, we have eliminated the risk of excessive water absorption into the core layer and consequential crack formation when drying the coated core layer of paper or paperboard.

According to a first aspect of the invention, there is now provided a method of producing a laminated packaging material comprising a core layer of paper or paperboard and a barrier layer applied on one side of the core layer, characterised in that a liquid barrier composition including a dispersion or solution of a polymer is applied as a barrier layer on at least one side of a carrier layer and is dried during heating for driving off the dispersant or solvent at a first drying temperature in a first step, and that the carrier layer with the applied, dried barrier layer is combined and permanently united with one side of the core layer in a second step, whereafter the dried barrier layer is cured by heating to above a second temperature being higher than the first temperature, in a third step.

One great advantage by curing the barrier layer in a step after laminating the carrier layer bearing the dried barrier layer, to the core layer is that less heat energy is required, because the paperboard layer will act as a heat insulating layer when heating the surface of the uppermost barrier composition layer to the higher curing temperature. The heat may advantageously be supplied by means of a flame treatment to the barrier layer surface.

Another important advantage is that a film of heat sensitive plastics may be used as the carrier layer also when curing of the dried barrier layer is to be carried out at temperatures above 130 °C.

The carrier layer bearing at least one said barrier layer may preferably be combined and united with the core layer by extrusion of a layer of thermoplastics therebetween.

Where said carrier layer bears a said barrier layer on one side thereof it therefore may be combined with the core layer by extrusion of a layer of thermoplastics between the carrier layer and the core layer.

An outer layer of thermoplastics, preferably polyethylene, is then applied on the barrier layer by means of extrusion.

When the carrier layer bears a said barrier layer on one or both sides it may be combined with the core layer by extrusion of a layer of thermoplastics between the core layer and a said barrier layer.

1999-05-07

46 46137923

Huvudfoxen Kassan

5

If said carrier layer bears a said barrier layer on both sides thereof, a layer of thermoplastics may then be applied to the outer layer of barrier material by extrusion.

Preferably, the barrier layer is applied by means of liquid film coating with a liquid, preferably aqueous, composition including a dispersion or solution of a polymer. For example PVOH may be applied in the state of an aqueous solution.

The polymer preferably is a high hydrogen-bonding polymer having hydrogen-bonding groups or ionic groups to an extent of 20 weight % and above of the polymer molecule. More preferably, the polymer has functional hydroxyl groups and may for instance be selected from among polyvinyl alcohol (PVOH), ethylene vinyl alcohol (EVOH), polysaccharides such as starch, starch derivatives, carboxyl methyl cellulose and other cellulose derivatives, or a mixture of two or more thereof. Also polymers having nitrogen-containing groups may be employed. Most preferably, the polymer is a polymer having gas barrier properties itself, specifically polyvinylalcohol, starch or a starch derivative.

Said aqueous polymer dispersion or polymer solution applied as barrier layer may be dried at a first drying temperature of preferably approximately at least 80 °C.

Most preferably, materials including PVOH and EAA are preferably first dried at web temperatures from 80 to 160 °C (preferably 140 to 160 °C) in a first step and are cured at web temperatures from 170 to 230 °C, preferably from 170-190 °C in a second stage resulting in an improved gas barrier at 80 % RH. According to the present invention, the carrier and barrier material is allowed to cool between the two steps.

A polymer with functional carboxylic acid groups may also be included. This may react with the polymer with functional hydroxy groups during the drying/curing process.

Suitably, the polymer with functional carboxylic acid groups is selected from among ethylene acrylic copolymer and ethylene methacrylic acid copolymers or mixtures thereof.

One preferred barrier layer mixture is of polyvinyl alcohol and ethylene acrylic acid copolymer (EAA). Another particularly preferred barrier layer mixture is of polyvinyl alcohol, EAA and an inorganic laminar compound. The EAA copolymer is preferably included in the barrier layer in an amount of about 1-20 weight%, based on dry coating weight.

Preferably, said inorganic laminar compound or so-called nanoparticle compound is dispersed to an exfoliated state, i.e. the lamellae of the layered inorganic compound are separated from each other by means of a liquid medium.

1999-09-07

Huvudfaxen Kassar

6

Thus the layered compound preferably may be swollen or cloven by the polymer dispersion or solution, which at dispersion has penetrated the layered structure of the inorganic material. It may also be swollen by a solvent before added to the polymer solution or polymer dispersion. Thus, the inorganic laminar compound is dispersed to an exfoliated and delaminated state in the liquid gas barrier composition and in the dried barrier layer.

The term clay minerals includes minerals of the kaolinite, antigorite, smectite, vermiculite or mica type, respectively. Specifically, laponite, kaolinite, dickite, nacrite, halloysite, antigorite, chrysotile, pyrophyllite, montmorillonite, hectorite, sodium tetrasilicic mica, sodium taeniolite, common mica, margarite, vermiculite, phlogopite, xanthophyllite and the like may be mentioned as suitable clay minerals.

The inorganic laminar compound or clay mineral preferably has an aspect ratio of 50-5000 and a particle size of up to about 5 μm in the exfoliated state.

Preferably, the barrier layer includes from about 1 to about 40 weight %, more preferably from about 1 to about 30 weight % and most preferably from about 5 to about 20 weight %, of the inorganic laminar compound based on dry coating weight. If the amount is too low, the gas barrier properties of the coated and dried barrier layer will not be markedly improved compared to when no inorganic laminar compound is used. If the amount is too high, the liquid composition will become more difficult to apply as a coating and more difficult to handle in storage tanks and conduits of the applicator system.

Preferably, the barrier layer includes from about 99 to about 60 weight %, more preferably from about 99 to about 70 weight % and most preferably from about 95 to about 80 weight % of said polymer based on the dry coating weight.

An additive, such as a dispersion stabiliser or the like, may be included in the gas barrier composition, preferably in an amount of not more than about 1 weight % based on the dry coating.

Preferably, the barrier layer is cured at a temperature of up to 230 $^{\circ}\text{C}$, preferably approximately about 170 $^{\circ}\text{C}$. The high temperature curing may be of short duration, such as corresponding to web speeds normally used in the packaging laminate production.

The barrier layer is preferably applied on the carrier layer in an amount, depending on the kind of polymer, of approximately 0,5 to 20 g/m^2 , more preferably approximately 1-10 g/m^2 , based on dry weight. If the coated amount is too low, the gas barrier properties may be inferior, while if the amount is too high, there is a risk for an inflexible barrier layer and crack formation therein.

Ink. t. Patent- och reg.verket

1999-09-07

7

Huvudfoxen Kossan

The carrier layer may consist of paper or plastics or plastics coated paper and preferred materials are described below. When paper is employed it is preferably thin. In one option the carrier layer preferably consists of paper with a grammage of approximately 5-35 g/m², e.g. 7-25 g/m², more preferably approx. 10-20 g/m². More preferably, the thin paper is coated by a thin layer of plastics, such as for example polyethylene.

The layer of plastics applied between the core layer and the carrier layer or a said barrier layer may include a substance functioning as light barrier. This is especially preferred when the carrier layer is of paper or other visually non-transparent material.

According to a second aspect of the invention, a laminated packaging material is provided, which is produced according to the above method of the invention.

According to a third aspect of the invention, a packaging container is produced by fold formation of a sheet or web-shaped laminated packaging material obtained by the above method according to the invention.

By applying, in a separate production stage, a liquid barrier composition including a polymer dispersion or polymer solution, and preferably further including an inorganic laminar compound, as a barrier layer on at least one side of a carrier layer and drying the barrier layer during heating for driving off water, and thereafter combining and permanently uniting the carrier layer with the applied, dried barrier layer to one side of the core layer and thereafter curing the dried barrier layer, there will be realised a laminate packaging material with a barrier layer possessing superior high performance oxygen barrier properties.

Thanks to the fact that the barrier layer is not dried at elevated temperature in connection with the lamination of the packaging material, the risk of excessive water absorption into the core layer and of drying of the core layer of paper or paperboard - with consequential risk of crack formation in the core layer - is wholly eliminated.

Given that the plastics layer applied between the core layer and a paper carrier layer may include a substance serving as light barrier, ideally carbon black, a light barrier layer will be realised whose unattractive black appearance may be concealed in a layer between the core layer and a thin paper layer carrying the barrier layer.

One important advantage of the method according to the aspect of the present invention is that the barrier layer produced in a separate stage may be employed in the production of a laminated packaging material in a corresponding manner and using corresponding production equipment as are employed today in

1999-09-07

Huvudfoxen Kassan

8

the production of packaging materials with aluminium foil as the oxygen gas barrier.

- Another important advantage of the method according to the present invention, wherein the curing of the barrier layer polymer at a higher curing temperature is carried out in a separate step after having laminated the carrier layer bearing the dried barrier layer to the core layer, is that also heat sensitive carrier layers such as thin thermoplastic films; for example of low density polyethylene (LDPE), may be used without risk of the film melting, shrinking, expanding or in other ways changing dimensions. Furthermore, less heat energy is required for reaching the curing temperature of the web surface thanks to the heat insulating effect of the paperboard core layer in the heated web.

DETAILED DESCRIPTION OF THE INVENTION

- The present invention will now be described in greater detail hereinbelow, with the aid of non-restrictive examples of methods, as well as packaging laminates obtainable by the method, according to preferred embodiments of the present invention and with reference to the accompanying drawings, in which:

Fig. 1 schematically illustrates a method of producing a carrier layer with a barrier layer according to the present invention applied thereon;

Fig. 2 schematically illustrates a method of producing the laminated packaging material according to the present invention;

Fig. 3 is a cross sectional view through a laminated packaging material according to the present invention; and

Fig. 4 is a perspective view from above of a conventional, configurationally stable packaging container which is produced from a laminated packaging material according to the present invention.

Referring to the Drawings, Figs. 1 and 2 schematically illustrate a method according to the present invention chosen by way of example for producing a laminated packaging material 10 shown in Fig. 3. A web of a carrier layer 11, for example of thin paper, which may preferably be coated with a thin layer of plastics, is unwound from a magazine reel 12 and led past an applicator 13 (ideally a liquid film coating apparatus) disposed adjacent the web, by means of which at least one barrier layer 14 of an aqueous composition comprising a dispersion or solution of a polymer and an inorganic laminar compound is applied on the one side of the carrier layer 11 in the form of a substantially cohesive barrier layer 14. In the case of a plastics coated paper carrier layer, the polymer dispersion or solution is preferably applied to the plastics coated side. The quantity of applied solution may vary, but is preferably in such an amount that a thoroughly integrated and

1999-09-07

Huvudfoxen Kossan

9

substantially unbroken layer is formed after drying, for example approx. 0.5-20 g/m², preferably 1-10 g/m², based on dry weight.

Where a composition including PVOH, and preferably also inorganic laminar compound, is used, the carrier layer 11 preferably consists of a layer of thin paper with a grammage of approx. 5-35 g/m², preferably 7-25 g/m², more preferably 10-20 g/m² or such a plastics coated paper layer, but may also be a plastics film. However, thin paper enjoys the advantage that it is not sensitive to temperature increases in connection with drying, as may be the case with plastic films.

The barrier layer 14 is applied on the carrier layer 11 in the form of an aqueous composition, comprising a polymer dispersion or polymer solution and preferably an inorganic laminar compound, the composition including a polymer with those properties which are desired to be added to the packaging laminate in the form of a coated layer, for example a polymer with functional hydroxyl groups, for instance polyvinyl alcohol, ethylene vinyl alcohol, starch, starch derivative, carboxy methyl cellulose and other cellulose derivatives or mixtures thereof.

The barrier layer 14 may also include a hydrophobic polymer as described in WO97/22536, for example a styrene butadiene copolymer.

The barrier layer 14 may also include a polymer with functional groups which are reactive with the functional hydroxyl groups in the above-mentioned polymer, for realising a cross-linked barrier layer 14. Such polymers may be polyolefins modified with carboxyl acid groups or graft copolymers with monomers containing carboxyl acid groups in an olefin homo- or copolymer. Alternatively, such polymers may be random selected copolymers of olefin monomers and monomers containing functional carboxylic acid groups, such as carboxylic acids, carboxylic acid anhydrides, metal salts of carboxylic acids or derivatives thereof. Specific examples of suitable functional polyolefins include polyethylene and polypropylene homo- or copolymers grafted with maleic acid anhydride, ethylene acrylic acid (EAA) or ethylene metacrylic acid (EMAA), or random selected copolymers.

It is particularly preferred that the barrier layer 14 includes a mixture of polyvinyl alcohol and ethylene acrylic acid copolymer or a mixture of polyvinyl alcohol, EAA and an inorganic laminar compound. The mixing ratio between polyvinyl alcohol and ethylene acrylic acid copolymer in the barrier layer 14 should be such that the polyvinyl alcohol may form a blanket protection against gas transport in the packaging laminate, at the same time as the quantity of ethylene acrylic acid copolymer should be sufficient to form a cohesive phase which partly protects the polyvinyl alcohol and partly effectively counteracts or prevents the transport of liquid through the polymer of the barrier layer 14.

1999-09-07

Huvudfoxen Kossan

10

The aqueous composition is preferably applied by means of liquid film coating technology, also called "dispersion coating" or "wet coating", which is well known in the prior art of coating of aqueous solutions and dispersions, but also other coating methods are feasible according to the invention, depending on the viscosity of the composition.

The web of carrier layer 11 is led, after coating, further past a drying apparatus 15, e.g. an IR drier or a hot air drier which acts on the coated side of the carrier layer 11 for driving off water and drying the applied barrier layer 14 at a web surface temperature of approx. 80-150°C.

Finally, the finished carrier layer 11 with the applied barrier layer 14 is rolled up and may subsequently be stored or employed direct in a conventional lamination process for the production of a laminated packaging material 10 possessing superior barrier properties.

The carrier layer 11 with the applied barrier layer 14 may ideally be employed for the production of packaging material 10 in a corresponding manner and using corresponding production equipment to that employed in the production of packaging material with aluminium foil as the barrier layer. Fig. 2 shows a web of a configurationally rigid but foldable core layer with a grammage of approx. 100-500 g/m², preferably approx. 200-300 g/m², which may be a conventional fibre layer of paper or paperboard of suitable packaging qualities. The core layer 16 is led through the nip between two rotating rollers 17 and is united with a web of carrier layer 11 with dried or cured barrier layer 14, during the application - employing an extruder 18 - of one or more layers of extrudable thermoplastic 19, preferably polyethylene, between the core layer 16 and the carrier layer 11. As shown, the barrier material 14 is preferably on the outer face of the carrier layer.

The web is subsequently forwarded to a curing station 24 where the web bearing said outermost barrier layer 14 is subjected to heat such that the surface temperature is raised to approximately 170 °C or above. Any heat source may be employed, but preferably the heat is supplied to the web surface by a flame, known as such in the art. The heat curing treatment is of short duration while the web is forwarded at normal web speed for packaging laminate production.

The thus laminated web is finally led through the nip between two rotating rollers 20 under the simultaneous application of thin layers 21, 22 of extrudable thermoplastics, preferably polyethylene, against both outer sides of the web employing extruders 23, the finished laminated packaging material 10 according to the present invention obtaining the cross-sectional structure schematically shown in Fig. 3. Alternatively, two extruders 23 may be disposed in sequence for the

Ink. t. Patent-översikt

46 46137923

1999-09-07

11

Huvudfoxen Kossan

consecutive extrusion of thin layers 21 and 22 of thermoplastic on the respective outer sides of the laminated web.

The two plastics layers 21 and 22 have for their purpose, on the one hand, to protect the packaging material 10 from the penetration of moisture and damp from the outside and, also the crucial function of rendering the packaging material sealable by conventional so-called thermosealing, whereby mutually facing layers of plastic may be joined together under the supply of heat and pressure by surface fusion. The thermosealing operation realises mechanically strong, liquid-tight sealing joints during the conversion of the packaging material into finished packaging containers.

The outer plastics layer 22 which is applied on the packaging material 10 on that side of the core layer 16 which, in the finished packaging container, is intended to be turned to face towards the outside may be provided with a suitable print of a decorative and/or informative nature for identifying a packed product.

From the laminated packaging material according to the present invention, liquid-tight, dimensionally stable packages possessing superior oxygen gas barrier properties may be produced employing known packaging and filling machines which, in a continuous process, form, fill and seal the material into finished packages 50. An example of such a conventional, packaging container 50 is shown in Fig. 4.

By first uniting the longitudinal edges of a web-shaped laminated packaging material 10 into a tube which is filled with the contemplated contents, whereafter individual packages 50 are separated from the web by repeated transverse sealing of the tube below the level of the contents. The packages 50 are separated from one another by incisions in the transverse sealing zones and obtain the desired geometric configuration, normally parallelepipedic, by a final fold formation and sealing operation.

Thus a further important advantage by a preferred embodiment of the method illustrated, is that the steps of application and drying of the liquid gas barrier composition may be performed off the lamination processing line, thus avoiding costly modifications and re-construction of the lamination equipment in the manufacturing of packaging laminates having a core layer. By applying the barrier layer on to a thin carrier layer such as a plastics film or a thin paper having a smooth, essentially non-absorbing surface, in the sub-sequence lamination with further layers of plastics and a core layer, the lamination operation may be performed using the same equipment and process as is used today, when laminating for example aluminium foil and inside layers.

1999-09-0

Huvudfaxen Kossan

12

5 The method of curing the barrier layer at an elevated temperature in a step after laminating the carrier with the barrier layer to the core layer is particularly advantageous, because the carrier layer in this case does not have to be dimensionally heat resistant and because less heat energy is required for reaching the curing temperature. When curing the barrier layer merely applied onto the thin carrier layer, the heat energy rapidly dissipates through the thin carrier layer out of the web and it therefore takes longer time to reach the required web surface curing temperature.

10 From sheet or web-shaped, preferably pre-creased and colour decorated, blanks of the packaging laminate 10, liquid-tight, preferably dimensionally stable packages of the single-use disposable type are produced in accordance with conventional "form-fill-seal" technology, according to which the packages are formed, filled and sealed by means of modern, rational packaging and filling machines. From, for example, a web of the packaging laminate, such packages
15 are produced in that the web is first reformed into a tube, by both longitudinal edges of the tube being united with another by heat sealing in a longitudinal overlap joint seal. The tube is filled with the pertinent contents, for example liquid food, and is divided into individual packages by repeated transverse sealings of the tube, transversely across the longitudinal axis of the tube, beneath the level of
20 the contents in the tube. The packages are finally separated from one another by transverse incisions along the transverse seals, thus forming pillow-shaped sealed packages. The pillow-shaped packages may be distributed as such or first given a desired geometric, normally parallelepipedic form by an additional forming and heat-sealing operation in a per se known manner.

25 It should be noted that the various packaging laminates according to the invention may comprise a multiple number of layers in addition to those shown in the drawings. It will thus be obvious to a person skilled in the art that the number of layers may vary and that the description of the illustrated embodiments should not, therefore, be considered as restrictive of the present invention.

30

Preparation Example 1

An aqueous dispersion of from about 1-5 weight % exfoliated flake-shaped mineral particles (natural, e.g. Montmorillonite, or synthetic, e.g. Laponite) having an aspect ratio of about 50-5000, is blended with an aqueous solution of about 5-
35 30 weight % of PVOH (having a molecular weight of 16000-200000 g/mol and a saponification degree of 95-100 %) at 60-90 °C during 2-8 hours. The dispersion of exfoliated laminar mineral particles may be stabilised by means of a stabiliser

1999-09-07

Huvudfoxen Kasson

13

- additive. Alternatively, the laminar mineral particles are exfoliated in the PVOH-solution at 60-90 °C during 2-8 hours. Aqueous ethylene acrylic acid copolymer dispersion is added to the aqueous mixture of PVOH and mineral particles. The resulting mixture is dispersion coated by from about 1 to about 10 g/m² based on
- 5 dry coating weight onto a thin plastic coated paper carrier layer. The wet coating is applied as a solution/dispersion in water and dried at a web surface temperature of 100-150°C. The carrier layer bearing the dried barrier layer was extrusion laminated to the core layer and subsequently exposed to a web surface temperature of 170-190°C for curing of the barrier layer.

1999-09-07

46 46137923

Huvudfaxen Kassan

14

WHAT IS CLAIMED IS:

1. A method of producing a laminated packaging material (10) comprising a core layer (16) of paper or paperboard and a barrier layer (14) applied on one side of the core layer, **characterised in that** a liquid barrier composition including a dispersion or solution of a polymer is applied as a barrier layer (14) on at least one side of a carrier layer (11) and is dried during heating for driving off liquid at a first drying temperature in a first step, and that the carrier layer (11) with the applied, dried barrier layer (14) is combined and permanently united with one side of the core layer (16) in a second step, whereafter the dried barrier layer (14) is cured by heating to above a second temperature being higher than the first temperature, in a third step.
2. The method as claimed in Claim 1, **characterised in that** the carrier layer (11) bearing at least one dried barrier layer (14) is combined and united with the core layer (16) by extrusion of a layer of thermoplastics (19) therebetween.
3. The method as claimed in Claim 1 or 2, **characterised in that** said barrier layer (14) is applied on the carrier layer by means of liquid film coating with said liquid barrier composition.
4. The method as claimed in any of Claims 1 to 3, **characterised in that** said liquid barrier composition applied as a barrier layer (14) includes a polymer with functional hydroxyl groups.
5. The method as claimed in Claim 4, **characterised in that** said polymer with functional hydroxyl groups is selected from among polyvinyl alcohol, ethylene vinyl alcohol, starch, starch derivatives, carboxyl methyl cellulose and other cellulose derivatives, or a mixture of two or more thereof.
6. The method as claimed in any of Claims 1 to 5, **characterised in that** said liquid barrier composition applied as a barrier layer (14) is dried at a web surface temperature of approx. 80-160°C.
7. The method as claimed in any of Claims 1 to 6, **characterised in that** said liquid barrier composition applied as barrier layer (14) also includes a polymer with functional carboxylic acid groups.

Ink. t. Patent- .verket

46 46137923

1999-09-07

Huvudfaxen Kassar

15

8. The method as claimed in Claim 7, characterised in that said polymer with functional carboxylic acid groups is selected from among ethylene acrylic acid copolymer and ethylene metacrylic acid copolymer or mixtures thereof.

5

9. The method as claimed in Claim 8, characterised in that said barrier layer (14) substantially consists of a mixture of polyvinyl alcohol and ethylene acrylic acid copolymer.

10

10. The method as claimed in Claim 8, characterised in that said barrier layer (14) substantially consists of a mixture of polyvinyl alcohol, ethylene acrylic acid copolymer and an inorganic laminar compound.

15

11. The method as claimed in any of Claims 7 to 10, characterised in that the dried barrier layer (14) is cured at a web surface temperature of up to 200°C, preferably approx. 170-190°C.

20

12. The method as claimed in any of Claims 1 to 11, characterised in that said barrier layer (14) is applied on the carrier layer (11) in an amount of approx. 1-10 g/m², based on dry coating weight.

25

13. The method as claimed in any of Claims 1 to 12, characterised in that said carrier layer (11) consists of thin paper optionally coated with a layer of plastics or of a plastics film.

30

14. The method as claimed in any of Claims 1 to 13, characterised in that said carrier layer (11) consists of paper with a grammage of approx. 5-35 g/m².

15. The method as claimed in any of Claims 1 to 14, characterised in that outer layers (21, 22) of thermoplastics, preferably polyethylene, are applied on the barrier layer (14) and the core layer (16) by means of extrusion.

35

16. The method as claimed in any of Claims 1 to 15, characterised in that the layer (19) of plastic applied between the core layer (16) and the carrier layer (11) includes a substance functioning as light barrier.

1999-09-01

46 46137923

Huvudfoxen Kassan

16

17. A laminated packaging material (10), characterised in that it is produced by the method as claimed in any of Claims 1 to 16.

5 18. A packaging container (24), characterised in that it is produced by fold formation of a sheet or web-shaped laminated packaging material (10) as claimed in Claim 17.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153

Ink. t. Patent reg.verket 46 46137923

1999-09-07

Huvudfoxen Kossan

17

ABSTRACT OF THE DISCLOSURE

The invention relates to a method of producing a laminated packaging material (10) including a core layer (16) of paper or paperboard and a barrier layer (14) applied on one side of the core layer.

The invention also relates to a laminated packaging material (10) produced according to the method, as well as a packaging container (50) which is produced from the laminated packaging material (10).

10 Publication figure: Fig. 3

Ink. t. Patent- och reg.

1999-09-07

Huvudfaxen Kassan

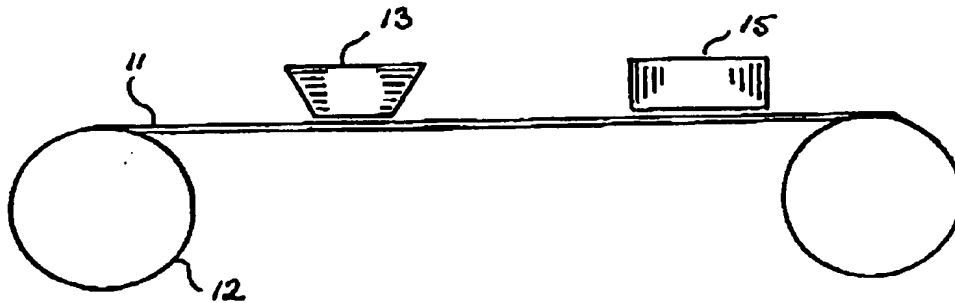


FIG 1

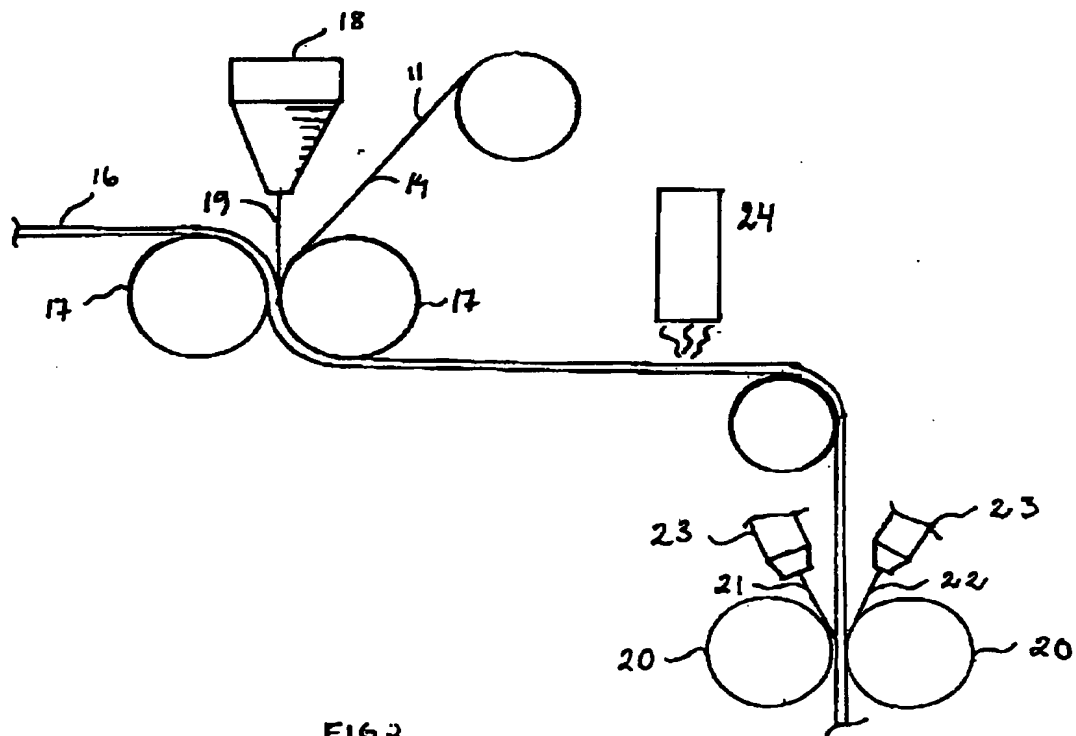


FIG 2

1999-09-07

Huvudfaxen Kassan

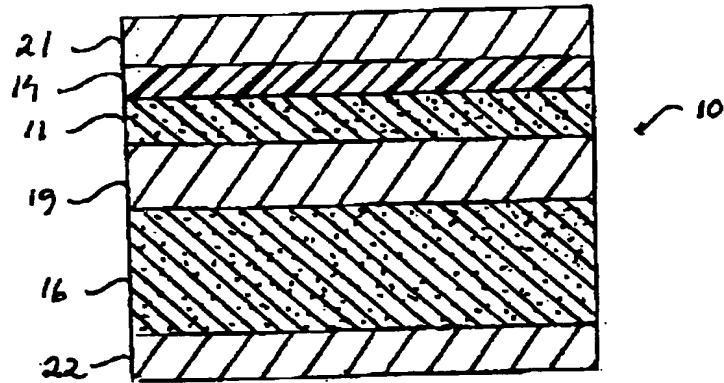


FIG 3

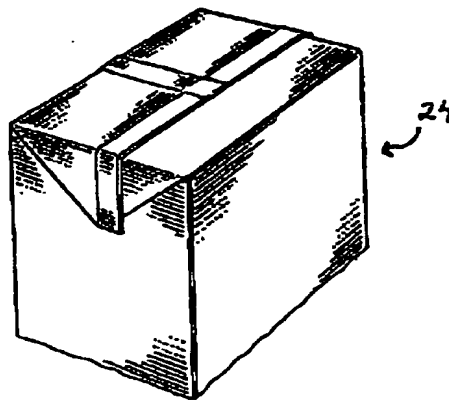


FIG 4